

PD80-TO46-BL S

F :

L V O
L C H S PIN S
L D C
E S

A :

D A O C
O LAN
OTDR

S :

Absolute Maximum Ratings:


Parameter	Symbol	Min.	Max.	Unit
R V	V_R	—	20	V
F C	I_F	—	10	A
M .O I P	P_{MAX}	—	10	W
O T	T	-40	+85	°C
S T	T	-40	+85	°C
L S T	—	—	260	°C
L S T	—	—	10	

Characteristics: (Ta=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
A D	D	—	—	80	—	
B	BW	$P = -10 \text{ dB}, S$ $, V_R = 5V$	—	2.0	—	GH
R	@1310	$V_R = 5V$	0.8	0.9	—	A/W
	@1550	$V_R = 5V$	0.9	0.95	—	A/W
D C	ID	$V_R = 5V$	—	0.03	0.16	A
C C	C	$V_R = 5V, = 1MH$	—	0.65	0.8	F
O S R R		—	1100	—	1650	
O V	V	—	—	-5	—	V



M D P A :

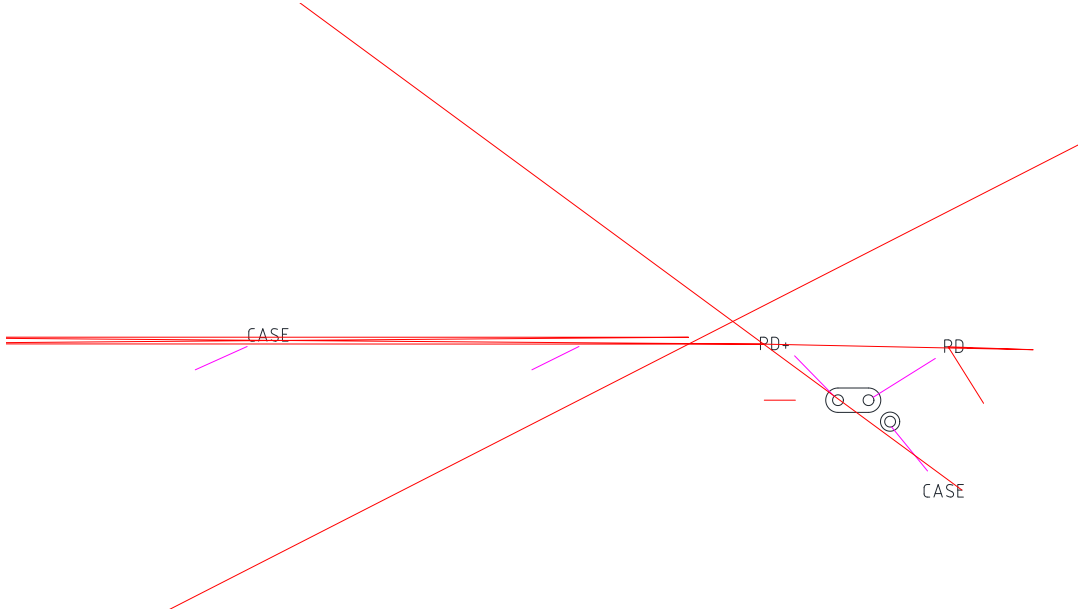



文件编号: SU-01-19-A-07-A06F

版本: 01

实施日期: 2018.9.13

第 3 页 共 3 页

Statement:

SAN-U

. A

SAN-U

. SAN-U

Contact Information:

A : N501-505 W B ., X P P F O C S , X ,
F , C

T : +86-592-3898601, 3898608, 5318000

F : +86-592-5703588

E : @ - .

<:// . - .>

:// . - .

T : +86-592-3898601

F : +86-592-5703588

E : @ - .